



Picture is just for reference

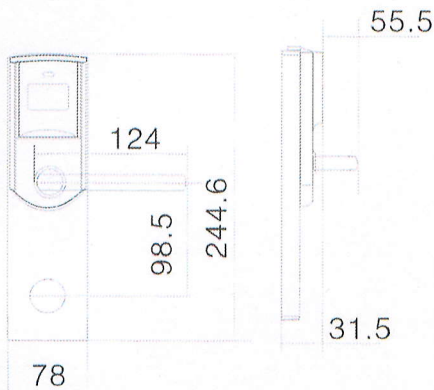

Front Panel

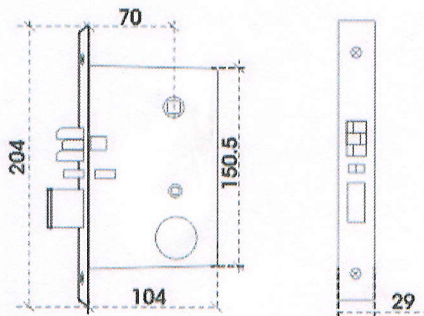

ANSI Mortise

- **Door Thickness :** 1 .5" --- 2 .0" inches
- **Surface Finish:** Stainless Steel or Satin Brass
- **Features**
 - **Software Version:** 5.7 C
 - **Card Type:** S50 & S70 Mifare
 - **Function Cards:** System Password Card, Lock Setting Card, Time Card, Check-Out Card, Locking Card, Authorizing Card, Query Card, Terminating Card, Reset SN Card, Passage card.
 - **Unlocking Cards:** Emergency Card, Master Card, Guest Card, Staff Card, Security Card.
 - **Query Card:** Accesses Audit Trail from the lock and provides time setting information for the lock.
 - **Terminating Card:** Can terminate any Unlocking Card issued by the same system.
 - **Temporary card:** Can be issued by staff card in case system shut down
 - **Emergency Card,** The only card that can open double lock and is not limited by time validity.
 - **Storage Capacity:** 50 Staff Cards, 255 Guest Cards, 447 most recent access records. Suite Door Setting is available, with 16 sub-rooms within each suite.
 - **Mortise Features:** The mechanical lock mechanism is a steel case mortise lock, which installs into a standard mortise lock door preparation. Latching is by a 3/4 " latch-bolt. The deadbolt has a 1" throw. (Maids locks do not have a deadbolt.) The outside knob (or lever) is rigid unless activated by a valid card. The inside lever is always active and simultaneously withdraws both latch bolt and deadbolt. The lock is equipped with standard, mechanical key override.
 - **Low Voltage Indication:** Alarm will sound and red and green light will flash alternately when batteries are low, alerting the staff to replace the batteries.
 - Mechanical Key Override for emergency entry.
 - ANSI And Euro Mortises are Option.

Parameter

- **Working Voltage:** DC4.2-6.4V, 4 X AA alkaline battery
- **Static Current:** ≤30uA
- **Dynamic Current:** ≤350mA
- **Alarm Voltage:** 4.2±0.2V
- **Working Temperature:** -10°C~55°C
- **Working Humidity:** 20%~93% RH
- **Net Weight:** 6 lbs
- **Opening Time:** 4~6S
- **Continuously Operating Battery Life:** 10,000 times, still can operate 100 times while in low voltage status.
- **Packing Details:** One lock in one inner box, 10 inner boxes packed into one carton.